





开口型

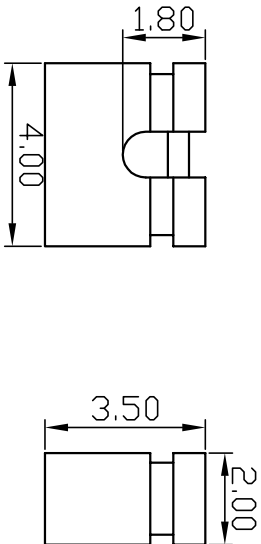

闭口型

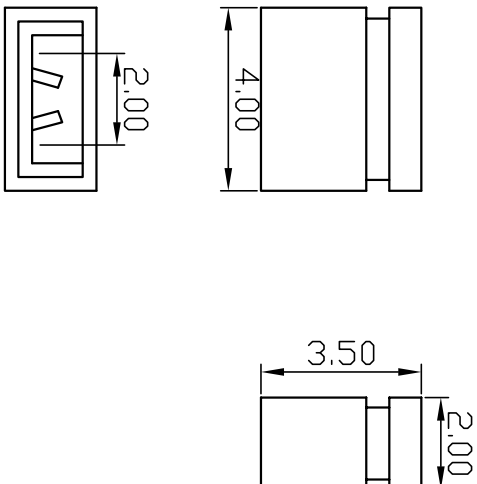

多连体

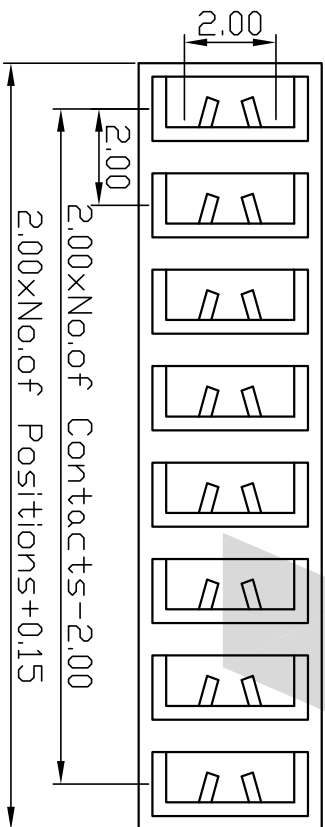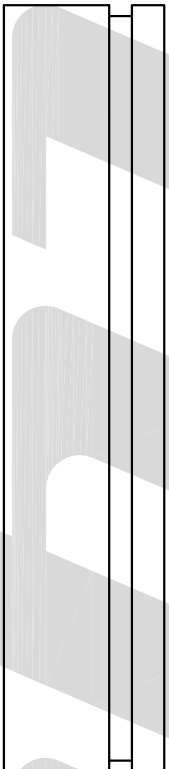

SPECIFICATIONS

Current Rating: 1.5AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor bronze
 Contact Plating: Au or Sn over 50 μ" Ni
 Insulator Material: Polyester(UL94V-0)
 Standard: PBT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦
 XX 2 X XX X X X

- | | |
|--|---|
| ① Connector Type: 11=Mini Jumper 21=Parallel Type 31=W/Wh Tail | ⑤ Function: C=Close Type O=Open Type |
| ② Pitch: 2=2.00mm 3=3.5mm 4=4.5mm 5=5.0mm | ⑥ Contact Plated 0=Tin 1=Gold Flash 2=Gold 3u" 3=Gold 5u" 4=Gold 10u" 5=Gold 15u" 6=Gold 30u" |
| ③ Plastics Height: 3=3.5mm 4=4.5mm 5=5.0mm | ⑦ Color: B=Black U=Blue R=Red W=White Y=Yellow G=Grey |
| ④ Number of Contacts: 01=Single Type 04=(1x4)Parallel Type 10=(1x10)Parallel Type 20=(1x20)Parallel Type | |

Units mm Scale 10:1

Tolerance Unless
 Otherwise Specified

.X ~ ±0.30

.XX ~ ±0.25

.XXX ~ ±0.20

Angle ~ ±3°

Drawing By Date

Check By Date

Approval By Date

LYCON

深圳市联益电子有限公司
 HTTP://WWW.LYCONN.COM

Date 2007/12/14

Sheet 1 of 1

2.00短路帽

Thirt Angle Projection

File Path

Drawing No. LY-DLM201-2-021

REV A

| | |
|----------|----------|
| E | |
| D | |
| C | |
| B | |
| A | RELEASED |
| REV ZONE | LTR |

| | | | | | | | |
|--------------|---|---------|------|-------|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| DESCRIPTION. | | ECN.NO. | Date | Angle | | | |

| | | | | | | | |
|--------------|---|---------|------|-------|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| DESCRIPTION. | | ECN.NO. | Date | Angle | | | |

| | | | | | | | |
|--------------|---|---------|------|-------|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| DESCRIPTION. | | ECN.NO. | Date | Angle | | | |

| | | | | | | | |
|--------------|---|---------|------|-------|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| DESCRIPTION. | | ECN.NO. | Date | Angle | | | |

| | | | | | | | |
|--------------|---|---------|------|-------|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| DESCRIPTION. | | ECN.NO. | Date | Angle | | | |

| | | | | | | | |
|--------------|---|---------|------|-------|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| DESCRIPTION. | | ECN.NO. | Date | Angle | | | |

| | | | | | | | |
|--------------|---|---------|------|-------|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| DESCRIPTION. | | ECN.NO. | Date | Angle | | | |