Female Header

Pitch:2.54 mm

Single / Dual Row ;Bottom Entry

2.54mm单、双排排母/蜈蚣脚

Series
215

lycn®
Http://www.lyconn.com

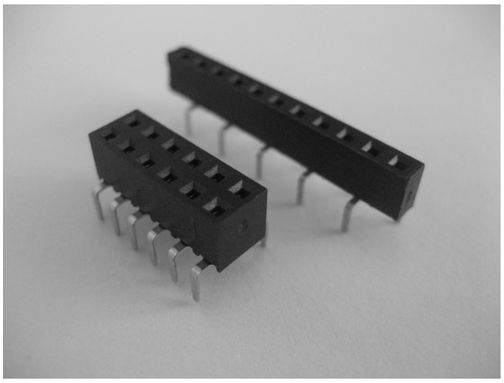

SPECIFICATIONS (技术参数):

Current Rating (额定电流):	3.0 A
Contact Resistance (接触电阻):	30mΩ Max
Insulation Resistance (绝缘电阻):	1000MΩ Min
Withstand Voltage (耐压值):	600VAC/minute
Operation Temperature (工作温度):	-40℃ to +105℃

MATERIALS (材质):

Contact Material (接触件材质):	Copper Alloy
Contact Plating (接触件电镀):	Gold or Tin over 50μ″Ni
Insulator Material (绝缘体材质):	Polyester(UL94V-0) Standard: PBT

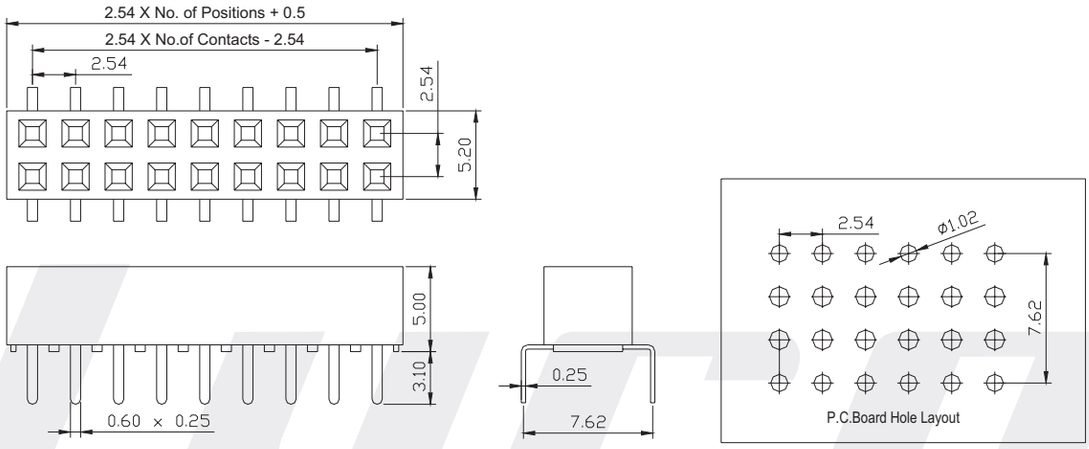

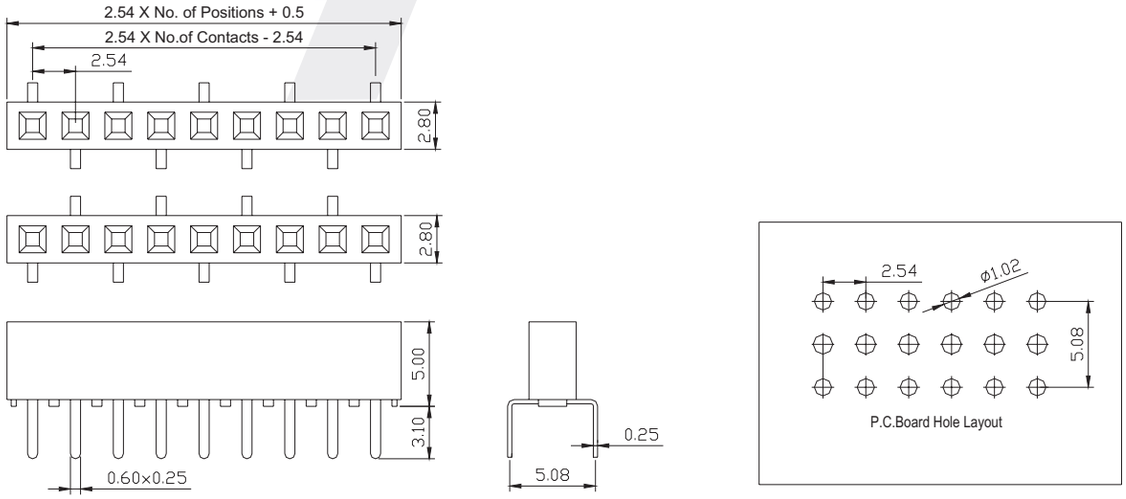

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 1 5 X XX B X X 1 0

① Series No.:
2= Female Header

② Pitch: 1= 2.54mm

③ Insulator Height:
5 = 5.0mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row = 01 to 40
Double row=02 to 80

⑥ Tail & Mounting Style:
B=Bottom Entry

⑦ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

⑧ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑨ Color:1=Black

⑩ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.

P40-148-k.prn
\\192.168.1.160\output\11-29\刘在位\P40-148-k.cdr
Monday, November 29, 2010 23:58:32