

Female Header

Dual Row; W/P S.M.T Type Base 2.00H
1.00双排贴片排母


Pitch: 1.00mm

Series

252



[Http://www.lyconn.com](http://www.lyconn.com)





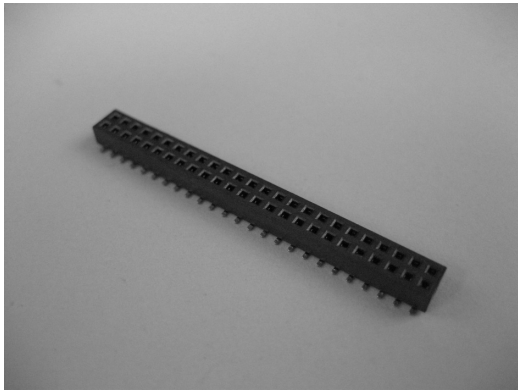


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 1.0 A
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 500MΩ Min
 Withstand Voltage (耐压值): 200VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Copper Alloy
 Contact Plating (接触件电镀): Gold or Tin over 50 μ " Ni
 Insulator Material (绝缘体材质): Polyester(UL94V-0)
 Standard: LCP

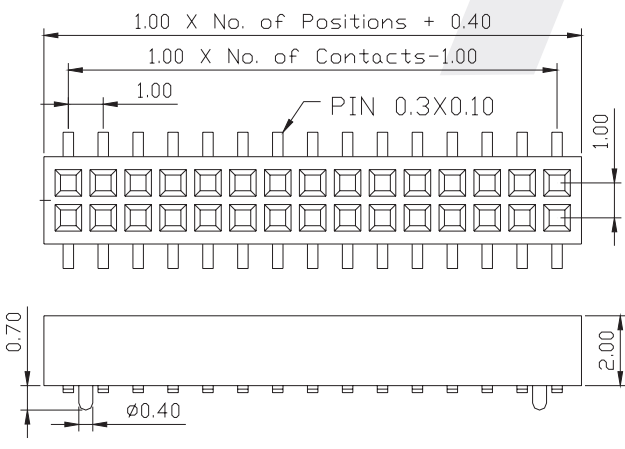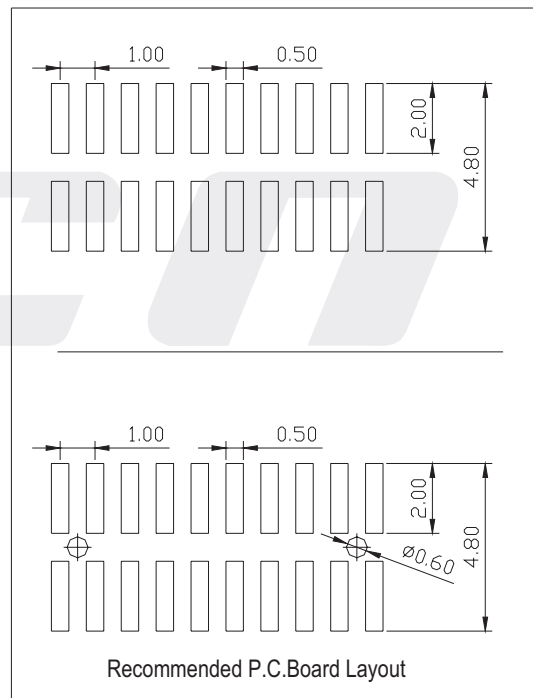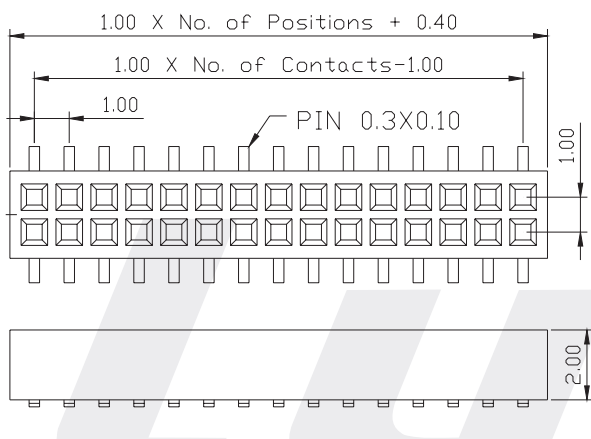

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩
2 5 2 2 XX M X X 1 0

① Series No.:
2= Female Header

③ Insulator Height:
2= 2.00mm

④ Dip Spacing:
1=Single row
2=Double row

⑤ Number of Contacts:
Single row = 01 to 40
Double row = 02 to 80

⑥ Tail & Mounting Style:
M= Straight SMT type

⑦ Contact Plated
0= Tin
1= Gold Flash
2= Gold 3u"
3= Gold 5u"
4= Gold 10u"
5= Gold 15u"
6= Gold 30u"

⑧ Material Type
0= PPS
1= PBT
2= LCP
3= Nylon-66
4= Nylon-6T
5= PA46

⑨ Color: 1= Black
⑩ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.

