


Upside contact
(上接)

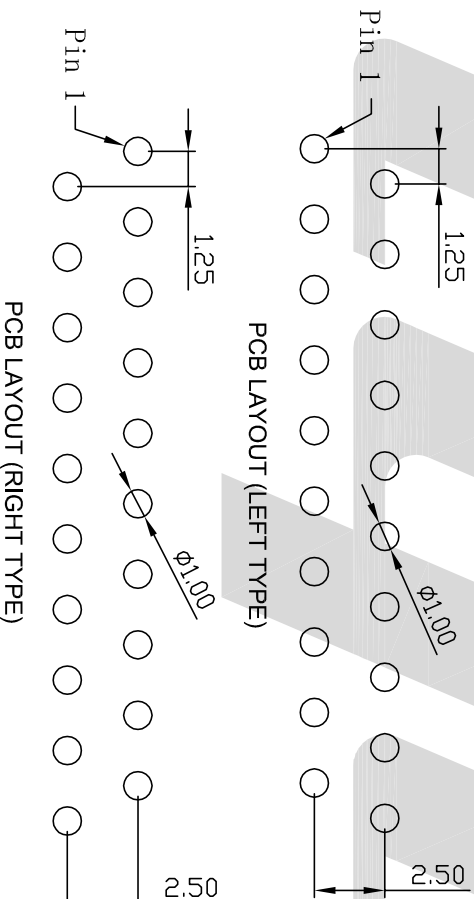

SPECIFICATIONS:


- Voltage rating: 200V DC/AC(rms)
- Current Rating: 1.0 AMP
- Contact Resistance: 30mΩ Max
- Insulation Resistance: 500MΩ Min
- Withstand Voltage: 500V AC/minute
- Operation Temperature: -20°C to +85°C
- Single Contact

MATERIALS:

- Contact Material: Phosphor Bronze
- Solder Tab: Stainless Steel
- Contact Plating: Tin over 50u" Ni
- Housing: LCP(UL94V-0)

Ordering Code

- ① Series No.: FPC
- ② L=Locking Type:
N=Non-locking.
- ③ Pitch:
2=1.25mm
- ④ Number of Contacts:
04 Pin~60 Pin
- ⑤ Plating Code:
1=Tin over Nickel
- ⑥ Trial & Mounting Style:
S=Stringht DIP Type
R=Right Angle Type
M=SMT Type
- ⑦ Connection Style:
D=Downside contact
U=Upside contact
V=Vertical contact
- ⑧ Suffix No.:
L=Left Type
R=Right Type



深圳市联益电子有限公司
HTTP://WWW.LYCONN.COM

E		Units	mm	Scale	5:1	Drawing By	Date
D		Tolerance Unless				Check By	Date
C		Otherwise Specified				Date	Date
B		.X ~ ±0.30				Approval By	Date
A		.XX ~ ±0.25				Date	Date
F		.XXX ~ ±0.20				Thirt Angle Projection	Thirt Angle Projection
		Angle ~ ±3°				File Path	File Path

1	2	3	4	5	6	7	8
REV ZONE	LTR	DESCRIPTION.	ECN NO.	Date	12/24-08	1 of 1	1.25 FPC/(卧插/不带锁/上接) 正/反脚
1	2	3	4	5	6	7	8